

Features:

- Rugged Shielded case
- Other standard and custom LPF models
- Wide selection of cut-off frequency
- Small & Rigid design
- Economical

Description:

The RFL3105-5005SLC is a Low pass filter in a shielded package fabricated using SMD LC technology. Covering DC-50 MHz band width, these units offer decent matching within the passband and high rejection in stopband.

Applications:

- Amateur Radio Equipment's
- Test and measurement equipment
- Secure communications
- AM Application
- Walkie Talkie
- Ham Radio
- Security systems
- Broadcasting
- Radio Communications
- Navigations



Optional Accessories :

- Adapter Kit
- Cable as per User Requirement (Figure 1)
- 50 Ω Termination
- Directional coupler Kit



Figure 1



S PARAMETER

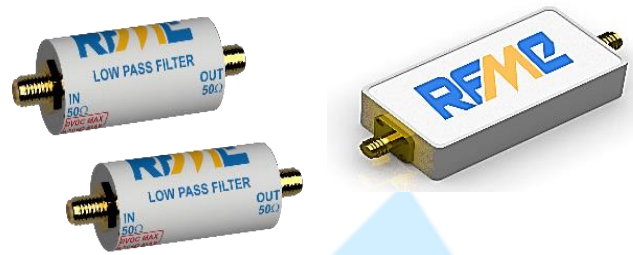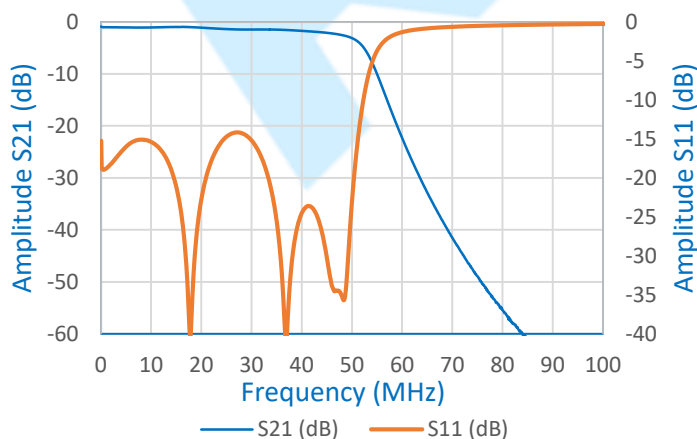

Electrical Specifications:

Frequency Range	DC – 50 MHz
Power Capacity	0.5 W
Insertion Loss Cutoff @ 50MHz	- 3 dB
Return Loss	-14 dB Min
VSWR	1.5:1
Input/output Connector	SMA (F)
Operating Temperature	0°C - 50°C

Mechanical Specifications:

Dimensions (mm) : 	(L) = 56 (B) = 28.7 (H) = 17.4 (A) = 49 (ϕ) = 19	
Shape:	Cuboidal/Cylindrical shape	
Weight :	Cuboidal :71 gm / Cylindrical :25 gm	

Filter Kits Available:

LPF (11 TYPES)
 HPF (9 TYPES)
 BPF (5 TYPES)



LOW PASS
FILTER KIT

FILTER KIT